



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm	18	25	kN			
16			48	100	0,0075	PCM 161825 M

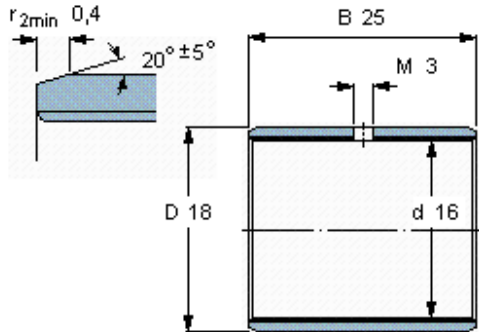

Specific load factor K 120
Material constant K_M 1900