


PCM 101215 E

Dimensions

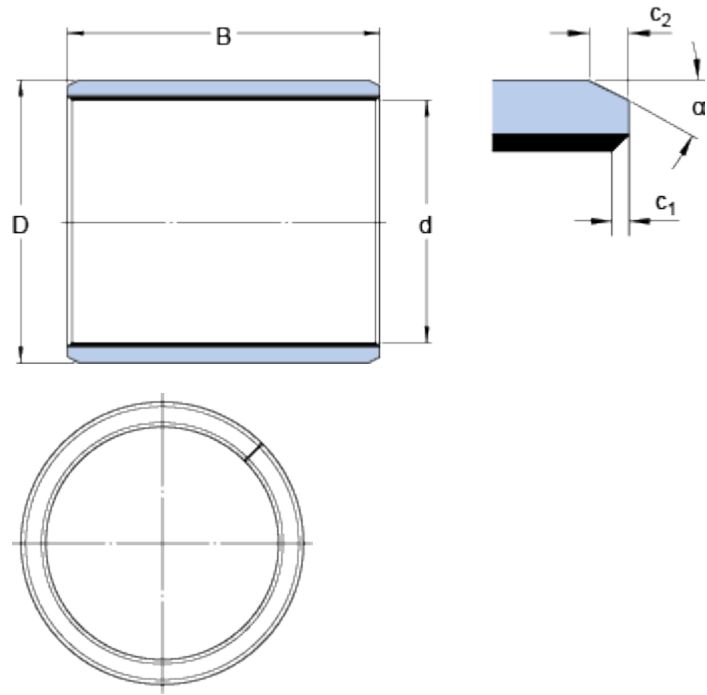

d		10	mm
D		12	mm
B		15	mm
c ₁	min.	0.1	mm
c ₁	max.	0.6	mm
c ₂	min.	0.2	mm
c ₂	max.	1	mm
α	±8	20	°

Recommended fits

Tolerance shaft	f7
Tolerance housing	H7

Calculation data

Basic dynamic load rating C - radial direction		12	kN
Basic static load rating - radial direction	C ₀	37.5	kN
Specific dynamic load factor	K	80	N/mm ²
Specific static load factor	K ₀	250	N/mm ²
Factor depending on material and bearing type	K _M	480	
Permissible sliding velocity	v	min.	0 m/s
Permissible sliding velocity	v	max.	2 m/s
Coefficient of friction	μ	min.	0.03
Coefficient of friction	μ	max.	0.25

Mass

Mass bushing	0.0038	kg
--------------	--------	----

