


15X25X6 HMSA10 RG

Type of outside diameter	Rubber metal reinforced
Lip material	Nitrile rubber (NBR)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

Dimensions

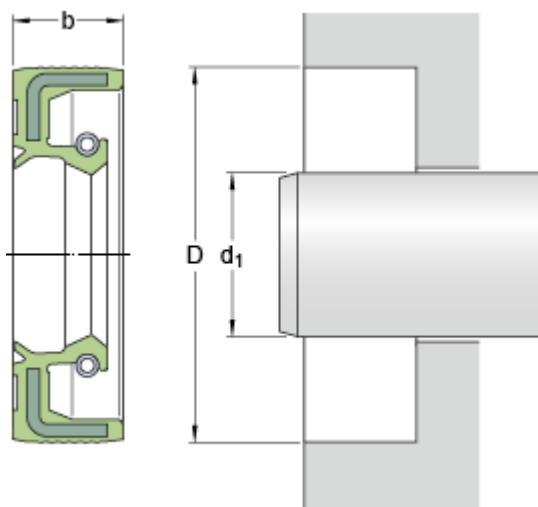

d_1	15	mm
D	25	mm
b	6	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Permissible operating temperature, short periods	max.	120	°C
Shaft speed	max.	3780	r/min
Shaft surface speed	max.	2.96	m/s