


50X100X10 HMSA10 RG

Type of outside diameter	Rubber metal reinforced
Lip material	Nitrile rubber (NBR)
Seal design	HMSA10

Dimensions

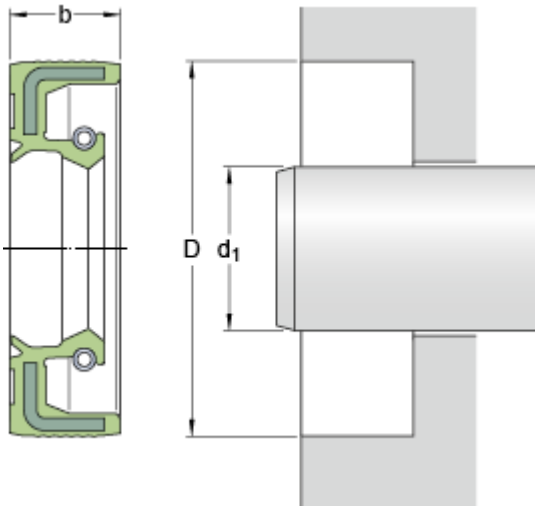

d_1	50	mm
D	100	mm
b	10	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Permissible operating temperature, short periods	max.	120	°C
Shaft speed	max.	3000	r/min
Shaft surface speed	max.	7.8	m/s