
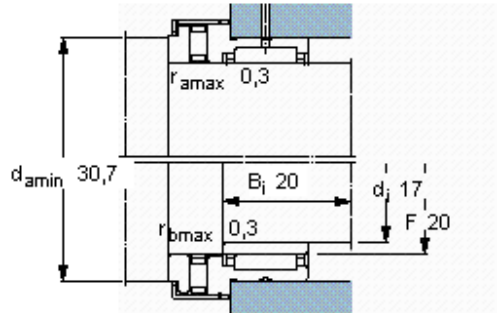


1_18, needle roller/full complement thrust ball bearings

Principal dimensions			Basic load ratings				Speed ratings		Limiting speed	Designation
F _w	D	C	radial dynamic C	static C ₀	axial dynamic C	static C ₀	Reference speed			
mm			kN				r/min		-	
20	30	30	16,5	25,5	18,6	48	3800	7500	NKXR 20 Z	

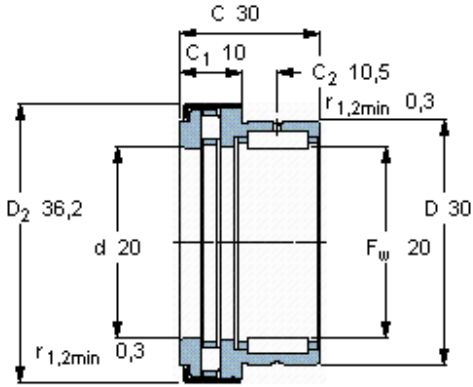

Appropriate inner ring

IR 17x20x20