


# KRE 62 PPA

## Dimensions

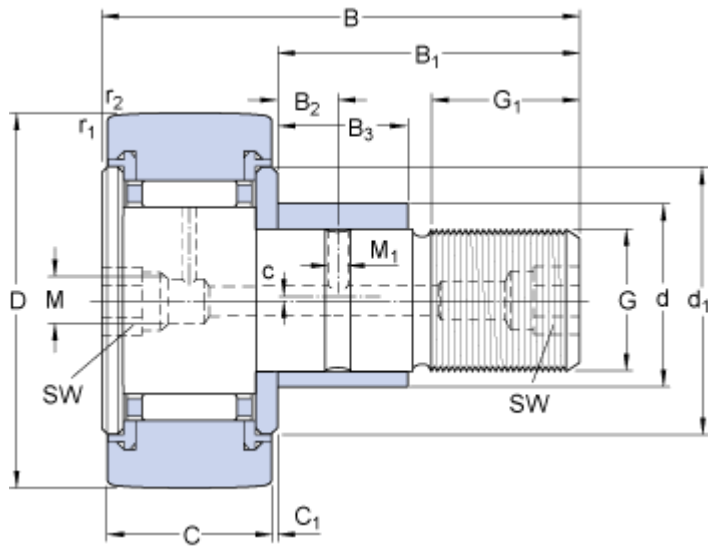

D	62	mm
d	28	mm
B	80	mm
C	29	mm
B <sub>1</sub>	49.5	mm
B <sub>2</sub>	11	mm
B <sub>3</sub>	22	mm
C <sub>1</sub>	0.8	mm
d <sub>1</sub>	44	mm
G	M 24x1.5	
G <sub>1</sub>	25	mm
M	8	mm
M <sub>1</sub>	4	mm
SW	14	mm
c	1	mm
r <sub>1,2</sub>	min.	1 mm

## Calculation data

Basic dynamic load rating	C	24.6	kN
Basic static basic load rating	C <sub>0</sub>	44	kN
Fatigue load limit	P <sub>u</sub>	5.5	kN
Maximum dynamic radial loads	F <sub>r</sub>	58.5	kN
Maximum static radial loads	F <sub>0r</sub>	85	kN
Limiting speed		2400	r/min

## Mass

Mass cam follower	0.798	kg
-------------------	-------	----

## Mounting information

Recommended	220	N·m
-------------	-----	-----

tightening torque

**Appertaining products**

---

Grease fitting	NIP A3x9.5
----------------	------------

Hexagonal nut	M 24x1.5
---------------	----------

**Appropriate products**

---

Lubrication adapter	AP 14
---------------------	-------

---