


40X72X10 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Fluoro rubber (FKM)
Seal design	HMSA10

Dimensions

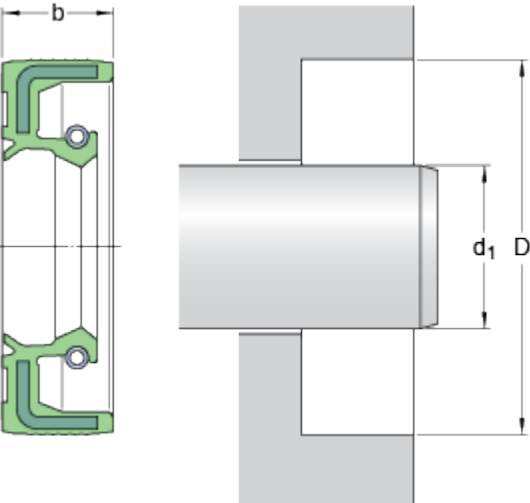

d ₁	40	mm
D	72	mm
b	10	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	10860	r/min
Shaft surface speed	max.	22.69	m/s