




71808-TN

Angular contact ball bearing

Materiálové číslo Schaeffler:
0096210240000

Angular contact ball bearing 718.-B-TVP,
single row, plastic cage

Technické informace

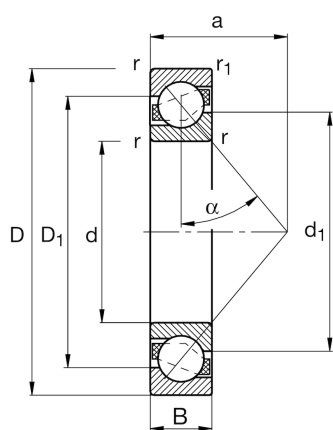

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	52 mm	Outside diameter
B	7 mm	Width
C_r	6.300 N	Basic dynamic load rating, radial
C_{0r}	5.800 N	Basic static load rating, radial
C_{ur}	405 N	Fatigue load limit, radial
n_G	16.200 1/min	Limiting speed
n_{gr}	7.200 1/min	Reference speed
	0,033 kg	Hmotnost

Mounting dimensions

$d_{a \min}$	42 mm	Minimum diameter of shaft shoulder
$D_{a \max}$	50 mm	Maximum diameter of housing shoulder
$D_{b \max}$	50 mm	Maximum diameter of housing shoulder
$r_{a \max}$	0,3 mm	Maximum fillet radius of shaft
$r_{a1 \max}$	0,2 mm	Maximum fillet radius of housing

Dimensions

r_{\min}	0,3 mm	Minimum chamfer dimension
$r_{1 \min}$	0,2 mm	Minimum chamfer dimension
D_1	47,3 mm	Shoulder diameter on outer ring wide side face
d_1	44,7 mm	Shoulder diameter on inner ring wide side face
a	22,8 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

