


Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
Fw	D	C	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
30	42	17	24,2	34,5	13000	15000	RNA 4905

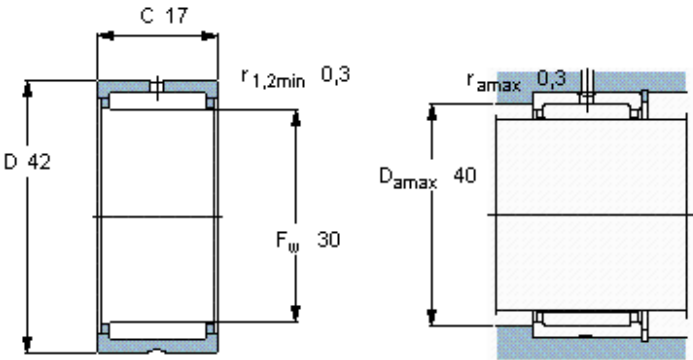

Appropriate seals	
G seal	-
SD seal	-
CR seal	30x42x6 HMS5 RG