



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
18	20	26	12	1	13,7	42,5	9,3	29	0,0073	PCMF 182012 E

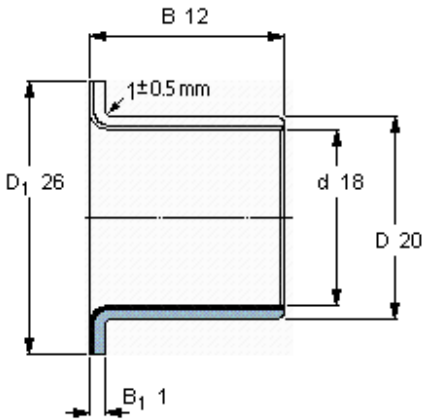

Specific load factor K 80
Material constant K_M 480