



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
55	60	40	260	540	0,13	PCM 556040 M

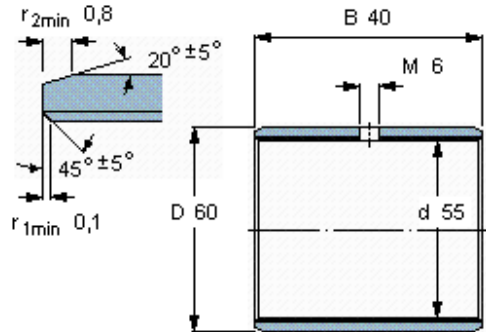

Specific load factor K 120
Material constant K_M 1900