


43X62X8 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Fluoro rubber (FKM)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

Dimensions

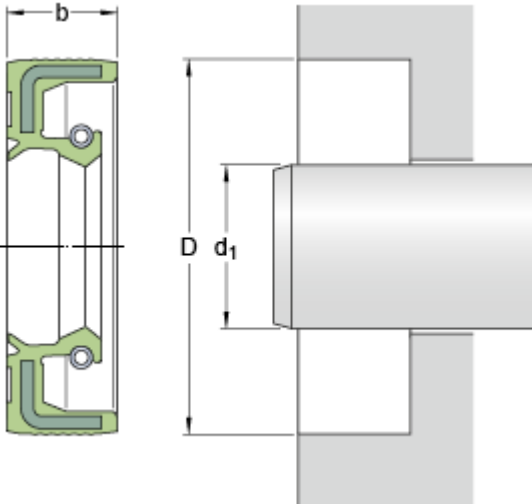

d ₁	43	mm
D	62	mm
b	8	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	10440	r/min
Shaft surface speed	max.	23.5	m/s