


FAG

30202-A>A

Tapered roller bearing

Materiálové číslo Schaeffler:
0946334950000Tapered roller bearings 302, main
dimensions to DIN ISO 355 / DIN 720,
separable, adjusted or in pairs

Technické informace

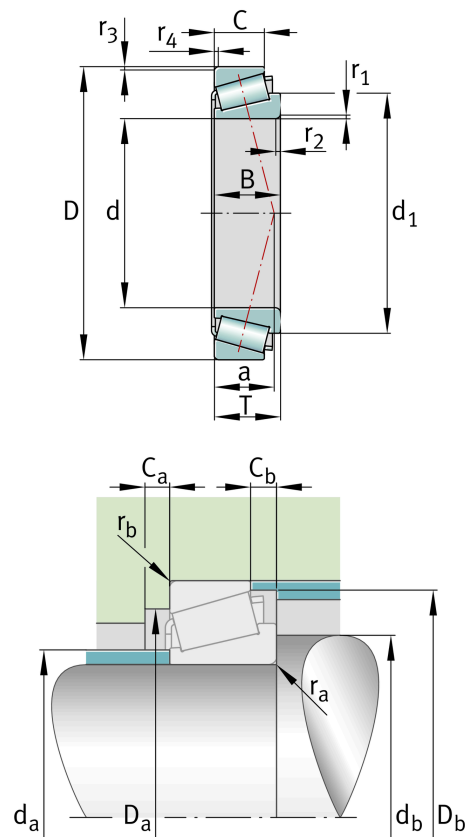

Main Dimensions & Performance Data

d	15 mm	Bore diameter
D	35 mm	Outside diameter
B	11 mm	Width, inner ring
C	10 mm	Width, outer ring
T	11,75 mm	Width, total
C_r	14.700 N	Basic dynamic load rating, radial
C_{0r}	14.100 N	Basic static load rating, radial
C_{ur}	1.350 N	Fatigue load limit, radial
n_G	23.400 1/min	Limiting speed
n_{gr}	13.500 1/min	Thermal speed rating
	56,13 g	Hmotnost

Mounting dimensions

$d_{a \max}$	20 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	19 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	29 mm	Minimum diameter of housing shoulder
$D_{a \max}$	29 mm	Maximum diameter of housing shoulder
$D_{b \min}$	32 mm	Minimum diameter of housing shoulder
$C_{a \min}$	2 mm	Minimum axial space
$C_{b \min}$	1,5 mm	Minimum axial space
$r_{a \max}$	0,6 mm	Maximum fillet radius of shaft
$r_{b \max}$	0,6 mm	Maximum fillet radius of housing

Dimensions

$r_{1,2 \min}$	0,6 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \min}$	0,6 mm	Minimum chamfer dimension of outer ring back face
a	8 mm	Distance between the apexes of the pressure cones
d_1	26,4 mm	Guidance rib diameter of inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Calculation factors

e	0,35	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1,73	Dynamic axial load factor
Y_0	0,95	Static axial load factor