


48X65X8 CRW1 V

Type of outside diameter	Metal-cased with sealant coating on the outside diameter
Lip material	Fluoro rubber (FKM)
Seal design	CRW1

Dimensions

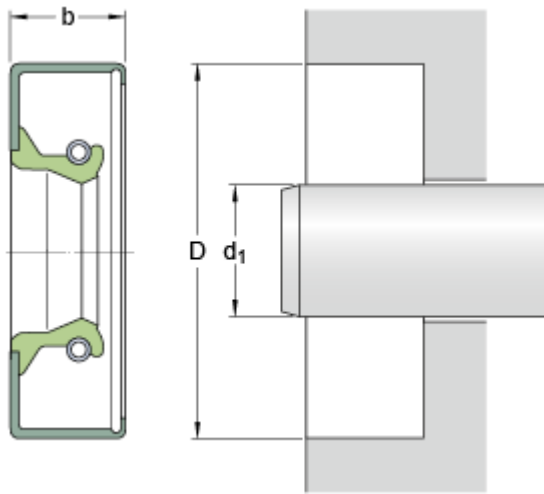

d_1	48	mm
D	65	mm
b	8	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Shaft speed	max.	9840	r/min
Shaft surface speed	max.	25	m/s