


80X110X12 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Fluoro rubber (FKM)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

Dimensions

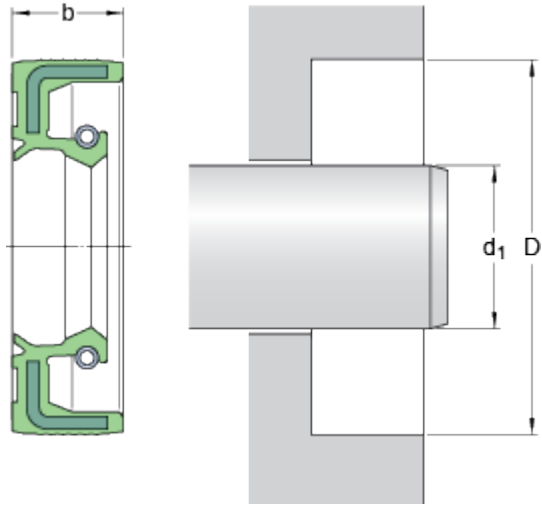

d_1	80	mm
D	110	mm
b	12	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	7260	r/min
Shaft surface speed	max.	30.47	m/s