


# 10X20X7 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Fluoro rubber (FKM)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

## Dimensions

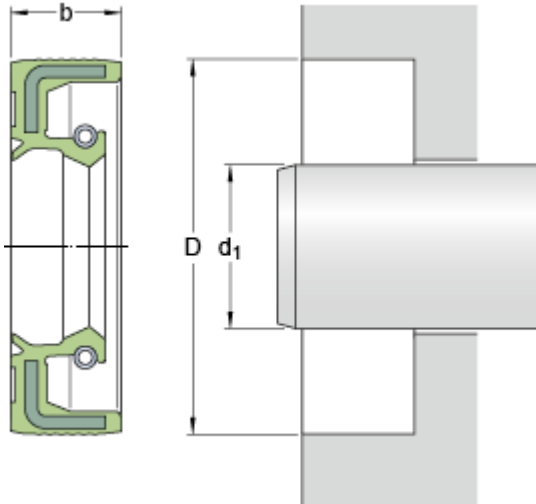

$d_1$	10	mm
D	20	mm
b	7	mm

## Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	13655	r/min
Shaft surface speed	max.	7.15	m/s