


SA 6 E

Dimensions

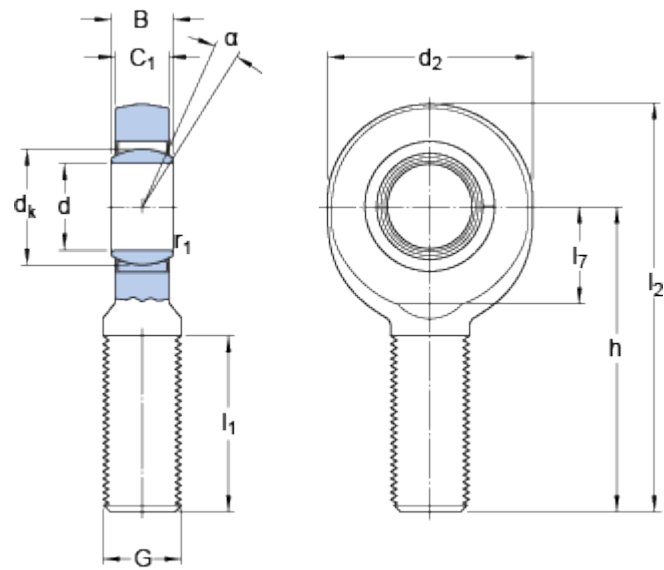

|                |      |     |    |
|----------------|------|-----|----|
| d              |      | 6   | mm |
| d <sub>2</sub> | max. | 22  | mm |
| B              |      | 6   | mm |
| G              |      | M 6 |    |
| C <sub>1</sub> | max. | 4.5 | mm |
| h              |      | 36  | mm |
| α              |      | 13  | °  |
| d <sub>k</sub> |      | 10  | mm |
| l <sub>1</sub> | min. | 16  | mm |
| l <sub>2</sub> | max. | 49  | mm |
| l <sub>7</sub> | min. | 10  | mm |
| r <sub>1</sub> | min. | 0.3 | mm |

Calculation data

|                              |                |     |                   |
|------------------------------|----------------|-----|-------------------|
| Basic dynamic load rating    | C              | 3.4 | kN                |
| Basic static load rating     | C <sub>0</sub> | 8.2 | kN                |
| Specific dynamic load factor | K              | 100 | N/mm <sup>2</sup> |
| Material constant            | K <sub>M</sub> | 330 |                   |

Mass

|              |       |    |
|--------------|-------|----|
| Mass rod end | 0.017 | kg |
|--------------|-------|----|