



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm	70	50	kN			
65	70	50	380	800	0,19	PCM 657050 M

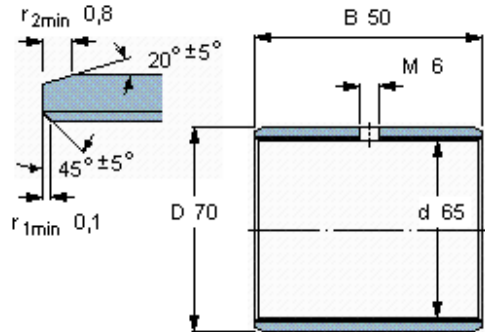

Specific load factor K 120
Material constant K_M 1900