


Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0		
mm			kN		kg	-
60	65	70	335	1040	0,26	PCM 606570 E

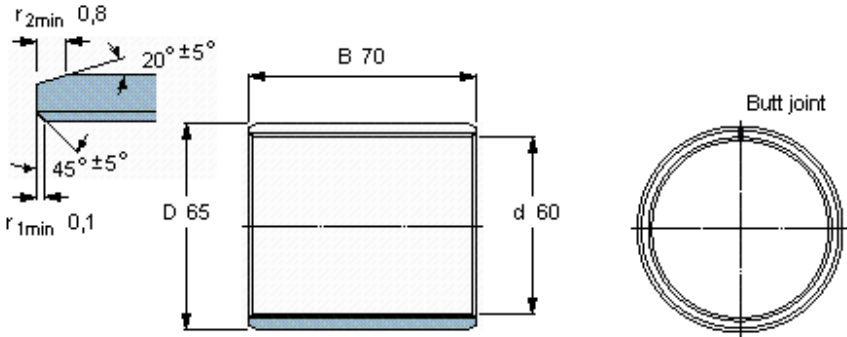

Specific load factor	K 80
Material constant	K _M 480