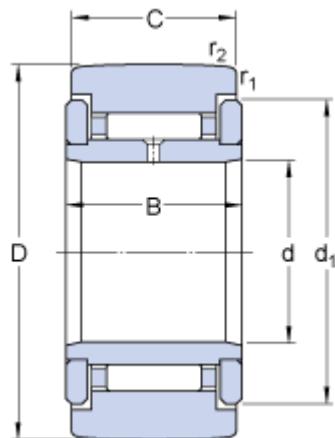


**NATR 20****Dimensions**

D	47	mm
d	20	mm
C	24	mm
B	25	mm
d <sub>1</sub>	36.5	mm
r <sub>1,2</sub> min.	1	mm

**Calculation data**

Basic dynamic load rating C	14.7	kN
Basic load rating, static C <sub>0</sub>	24.5	kN
Fatigue load limit P <sub>u</sub>	2.9	kN
Maximum static radial loads F <sub>r</sub>	23.6	kN
Maximum static radial loads F <sub>0r</sub>	33.5	kN
Limiting speed	3000	r/min

**Mass**

Mass support roller	0.246	kg
---------------------	-------	----