



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
F _w	D	C	dynamic C	static C ₀	Reference speed		
mm			kN		r/min		-
32	45	30	39,6	65,5	12000	14000	RNA 69/28

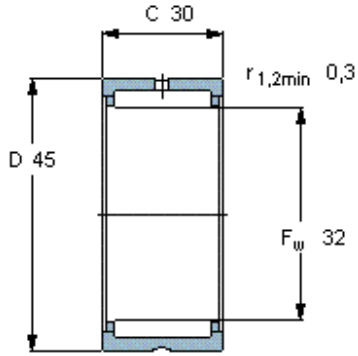

Appropriate seals

G seal	G 32x45x4
SD seal	-
CR seal	-