
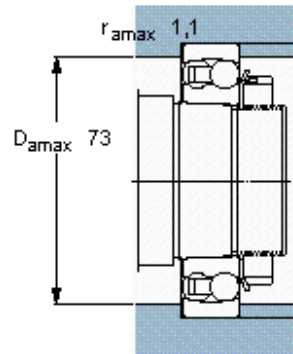


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
40	80	18	19,9	6,95	18000	11000	1208 EKTN9

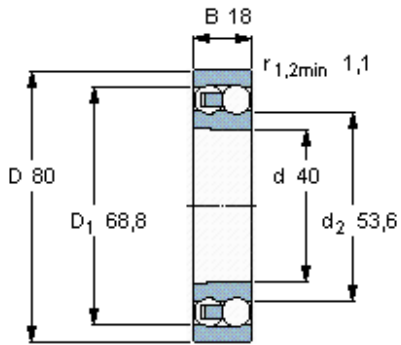

Tapered bore, taper
1: -

Calculation factors

- k_r 0,04
- e 0,22
- Y_1 2,9
- Y_2 4,5
- Y_0 2,8