



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings		Designation
F <sub>w</sub>	D	C	dynamic C	static C0	Reference speed	Limiting speed	
mm			kN		r/min		-
<b>90</b>	110	30	88	183	4500	5000	<b>RNA 4916</b>

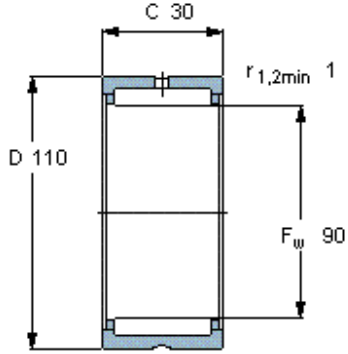

**Appropriate seals**

G seal	-
SD seal	-
CR seal	90x110x10 HMS5 RG