



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0		
mm			kN		kg	-
<b>20</b>	23	30	69,5	146	0,019	PCM 202330 M

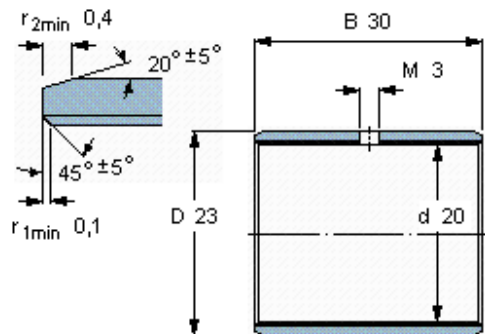

**Specific load factor** K 120  
**Material constant**  $K_M$  1900