
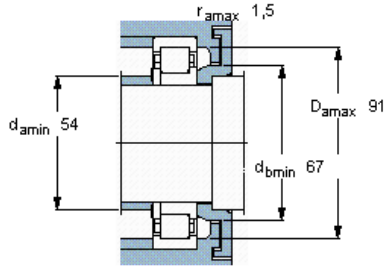


Cylindrical roller bearings, single row

| Principal dimensions | | | Basic load ratings | | Designation | Angle ring |
|----------------------|-----|----|--------------------|--------------|-------------------------------|-------------|
| d | D | B | dynamic C | static C0 | * SKF Explorer bearing | Designation |
| mm | | | kN | | - | - |
| 45 | 100 | 25 | 112 | 100 | NUP 309 ECP * | - |



Calculation factors

$k_r = 0,15$
 $e = 0,2$ $Y = 0,6$