



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0		
mm			kN		kg	-
<b>40</b>	44	40	190	390	0,066	PCM 404440 M

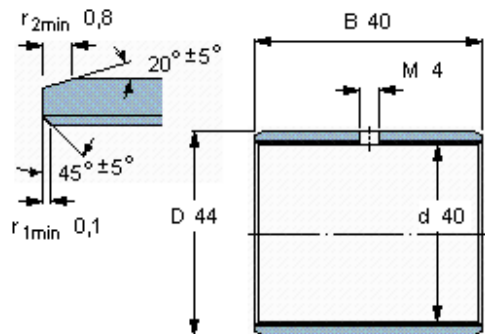

**Specific load factor** K 120  
**Material constant**  $K_M$  1900