



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
16	18	24	17	1	18,6	58,5	8,5	26,5	0,0081	PCMF 161817 E

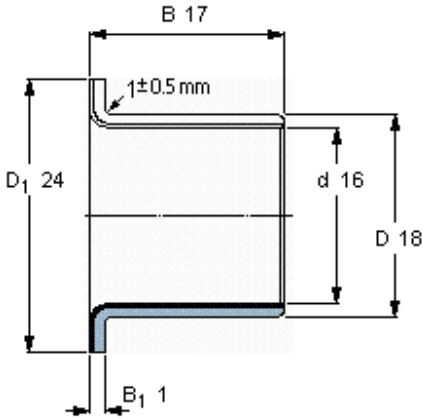

Specific load factor
Material constant

K 80
K_M 480