



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
F _w	D	C	dynamic C	static C ₀	Reference speed		
mm			kN		r/min		-
48	62	22	42,9	71	8000	9500	RNA 4908

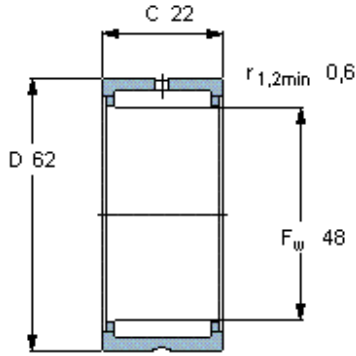

Appropriate seals

G seal	-
SD seal	-
CR seal	48x62x8 HMS5 RG