



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm	18	20	kN			
16			38	80	0,006	PCM 161820 M

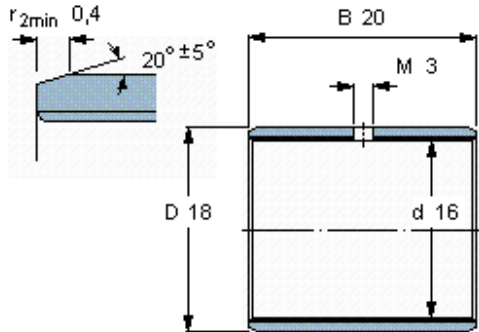

Specific load factor K 120
Material constant K_M 1900