



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
16	18	24	12	1	12,2	38	8,5	26,5	0,0062	PCMF 161812 E

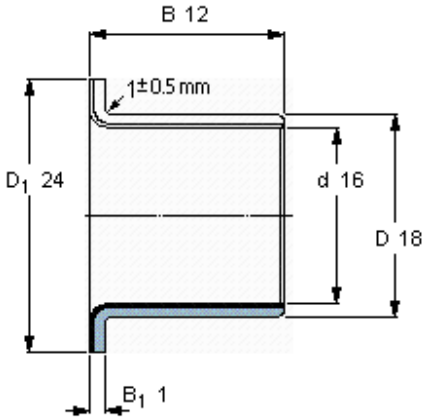

Specific load factor K 80
Material constant K_M 480