



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0		
mm			kN		kg	-
16	18	15	29	60	0,0045	PCM 161815 M

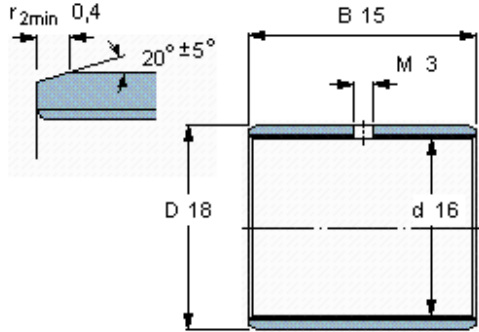

Specific load factor K 120
Material constant K_M 1900