
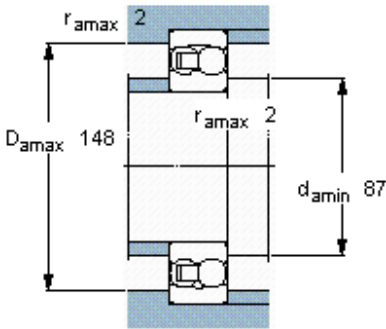


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
75	160	37	79,3	30	8000	5600	1315

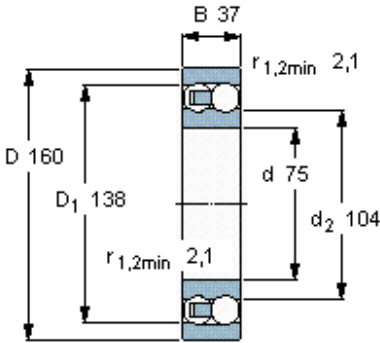

Calculation factors

- k_r 0,045
- e 0,22
- Y₁ 2,9
- Y₂ 4,5
- Y₀ 2,8