



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
20	23	30	16,5	1,5	22	69,5	17,3	54	0,017	PCMF 202316.5 E

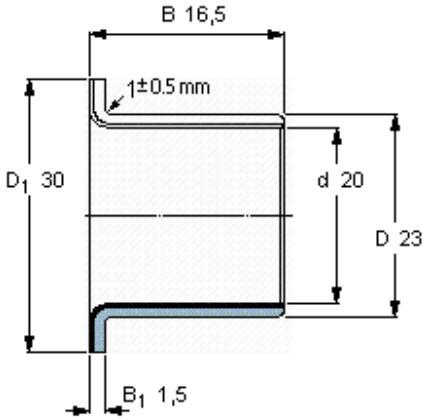

Specific load factor K 80
Material constant K_M 480