
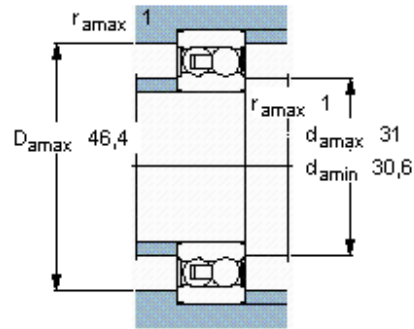


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
25	52	18	14,3	4	-	9000	2205 E-2RS1TN9

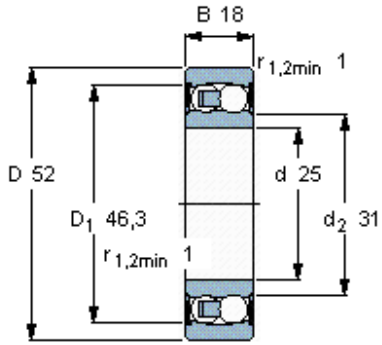

Calculation factors

- k_r 0,045
- e 0,28
- Y_1 2,2
- Y_2 3,5
- Y_0 2,5