



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
<b>15</b>	17	23	9	1	8,3	26	10,4	32,5	0,0051	PCMF 151709 E

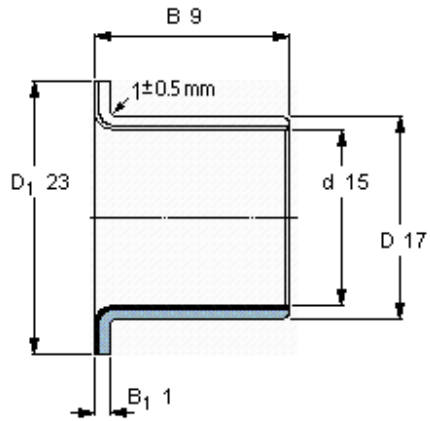

**Specific load factor**  
**Material constant**

K 80  
K<sub>M</sub> 480