



Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
<b>40</b>	44	20	91,5	193	0,036	PCM 404420 M

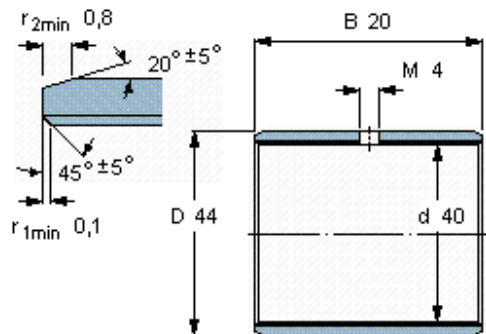

**Specific load factor** K 120  
**Material constant**  $K_M$  1900