
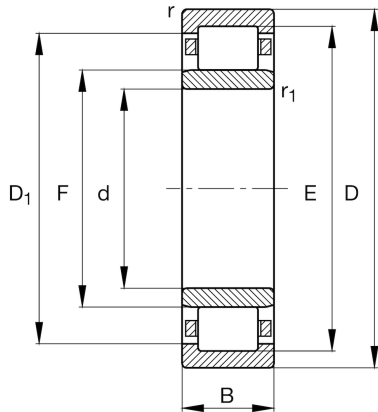


Technické informace

Main Dimensions & Performance Data

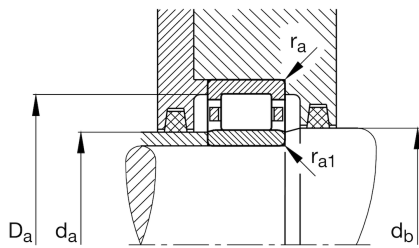

d	60 mm	Bore diameter
D	150 mm	Outside diameter
B	35 mm	Width
C _r	211.000 N	Basic dynamic load rating, radial
C _{0r}	184.000 N	Basic static load rating, radial
C _{ur}	24.900 N	Fatigue load limit, radial
n _G	8.600 1/min	Limiting speed
n _{gr}	4.800 1/min	Reference speed
≈m	3,39 kg	Hmotnost

Mounting dimensions

d _{a min}	74 mm	Minimum diameter shaft shoulder
d _{a max}	82 mm	Maximum diameter of shaft shoulder
d _{b min}	85 mm	Minimum shaft shoulder
D _{a max}	136 mm	Maximum diameter of housing shoulder
r _{a max}	2 mm	Maximum recess radius
r _{a1 max}	2 mm	Maximum recess radius

Dimensions

r _{min}	2,1 mm	Minimum chamfer dimension
r _{1 min}	2,1 mm	Minimum chamfer dimension
s	3,4 mm	Axial displacement
E	127 mm	Raceway diameter outer ring
F	83 mm	Raceway diameter inner ring
D _{1 min}	119,5 mm	Minimum rib diameter outer ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.



View product details on medias

02.04.2024, 09:37:31 CEST

SCHAEFFLER

