



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
$F_w$	D	C	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
<b>105</b>	125	26	78,1	166	3800	4300	<b>NK 105/26</b>

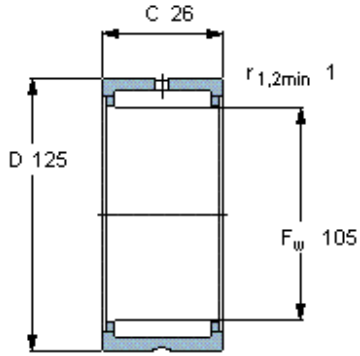

**Appropriate seals**

G seal	-
SD seal	-
CR seal	105x125x13 HMS4 R