



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings		Designation
F _w	D	C	dynamic C	static C0	Reference speed	Limiting speed	
mm			kN		r/min		-
58	72	22	47,3	85	7000	8000	RNA 4910

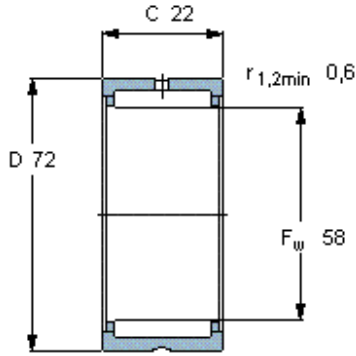

Appropriate seals

- G seal -
- SD seal -
- CR seal 58x72x8 HMS5 RG