


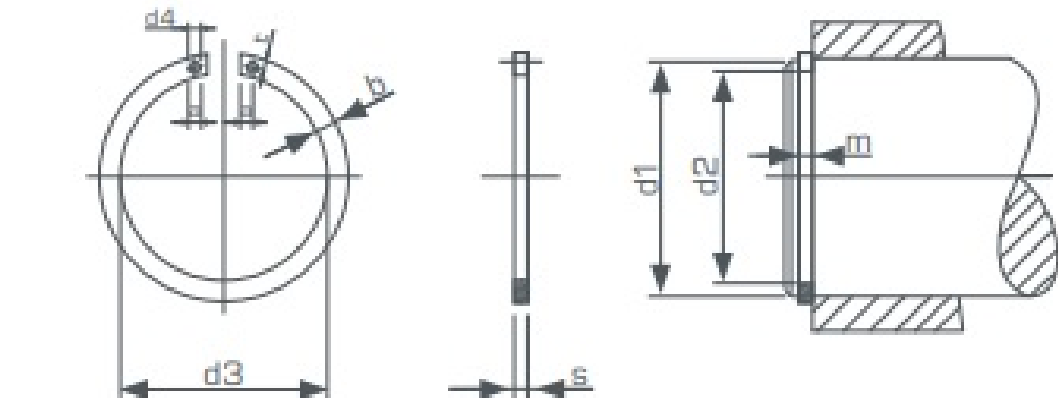

connection
dimension

description	bore d1 mm	ring						groove		
		d3 _{max} mm	b _{-0,2} mm	s _{-0,1} mm	d4 mm	t mm	a mm	d2 _{h11} mm	m _{min} mm	
WRE 42	42	39,3	3,6	1,5	1,7	1,8	3,0	39,8	1,6	
WRE 47	47	44,3						44,8		
WRE 55	55	51,8						52,8		
WRE 62	62	58,8						59,8		
WRE 68	68	64,6	4,8	2,0	2,5	2,0	3,5	65,8	2,2	
WRE 75	75	71,6						72,8		
WRE 80	80	76,6						77,8		
WRE 90	90	86,3	5,8	2,5	3,0	2,5	4,0	87,8	2,6	
WRE 95	95	91,3						92,8		
WRE 100	100	95,9						97,4		
WRE 110	110	105,4						107,1		
WRE 115	115	110,4						112,1		
WRE 125	125	120,1	7,5			3,5		4,0		122,1
WRE 130	130	124,9								127,1
WRE 140	140	134,8								137,0
WRE 145	145	139,8								142,0
WRE 150	150	144,4								147,0
WRE 160	160	154,1								157,0
WRE 170	170	163,4								167,0
WRE 180	180	173,0	9,8	3,0	3,5	4,5	176,0	3,2		
WRE 190	190	183,0					186,0			
WRE 200	200	192,5					196,0			
WRE 210	210	202,0					206,0			
WRE 220	220	212,0					216,0			
WRE 225	225	217,0	12,0			5,5	4,5		221,0	
WRE 230	230	222,0							226,0	
WRE 240	240	231,5							236,0	
WRE 260	260	249,5	14,0	4,0	4,0	7,0	254,0	4,2		
WRE 270	270	259,0					264,0			
WRE 280	280	269,0					274,0			
WRE 290	290	279,0					284,0			
WRE 300	300	288,5					294,0			
WRE 310	310	298,0	16,2			8,5	6,0		304,0	
WRE 320	320	308,0							314,0	
WRE 340	340	327,5							334,0	
WRE 360	360	347,0							354,0	
WRE 380	380	365,0							374,0	
WRE 400	400	385,0							394,0	
WRE 420	420	405,0	20,0	4,5	10	413,0	4,7			
WRE 460	460	442,0				453,0				

material: C75 - hardness: 45 - 50 HRC - surface: phosphatized, oiled - edge: free of burse