


Needle roller bearings, with machined rings, with flanges, with an inner ring

Principal dimensions			Basic load ratings		Speed ratings		Designation
d	D	B	dynamic C	static C0	Reference speed	Limiting speed	
mm			kN		r/min		-
120	165	45	176	405	3000	3400	NA 4924

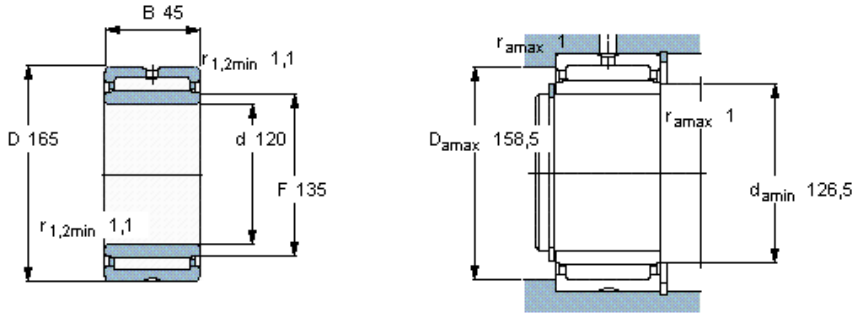

Permissible axial displacement from the normal position of one bearing ring relative to the other:
s 2