


KRVE 30 PPA

Dimensions

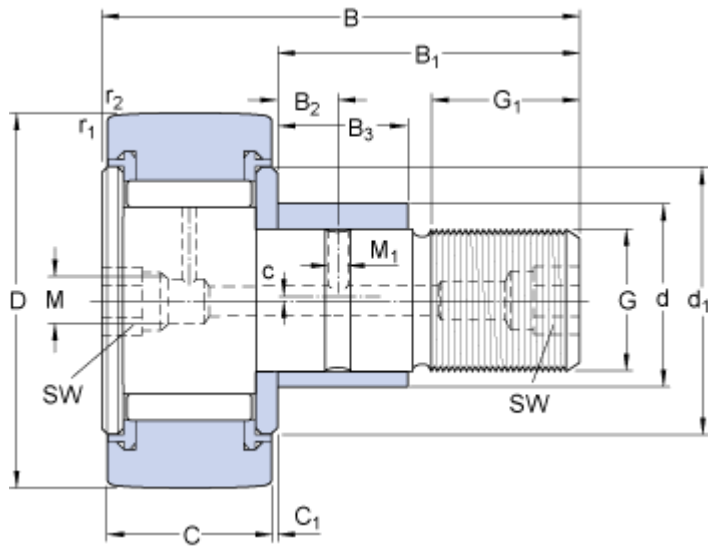

D	30	mm
d	15	mm
B	40	mm
C	14	mm
B ₁	25	mm
B ₂	6	mm
B ₃	11	mm
C ₁	0.6	mm
d ₁	23	mm
G	M 12x1.5	
G ₁	13	mm
M	4	mm
M ₁	3	mm
SW	6	mm
c	0.5	mm
r _{1,2}	min.	0.6 mm

Calculation data

Basic dynamic load rating	C	9	kN
Basic static basic load rating	C ₀	14.6	kN
Fatigue load limit	P _u	1.7	kN
Maximum dynamic radial loads	F _r	11	kN
Maximum static radial loads	F _{0r}	15.6	kN
Limiting speed		3200	r/min

Mass

Mass cam follower	0.096	kg
-------------------	-------	----

Mounting information

Recommended	22	N·m
-------------	----	-----

tightening torque

Appertaining products

Grease fitting

NIP A1x4.5

Hexagonal nut

M 12x1.5
