



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
25	28	35	11,5	1,5	17,3	54	20,4	64	0,016	PCMF 252811.5 E

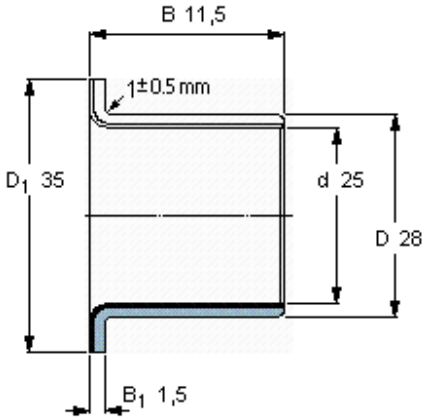

Specific load factor
Material constant

K 80
K_M 480