



Composite dry sliding bushings, Composite dry sliding flanged bushings

| Principal dimensions | | | | | Basic load ratings | | | | Mass | Designation |
|----------------------|---|----------------|---|----------------|--------------------|-----------------------|------------------|-----------------------|--------|---------------|
| d | D | D ₁ | B | B ₁ | radial dynamic C | static C ₀ | axial dynamic Ca | static C ₀ | | |
| mm | | | | | kN | | | | kg | - |
| 6 | 8 | 12 | 8 | 1 | 2,9 | 9 | 2,75 | 8,65 | 0,0019 | PCMF 060808 E |

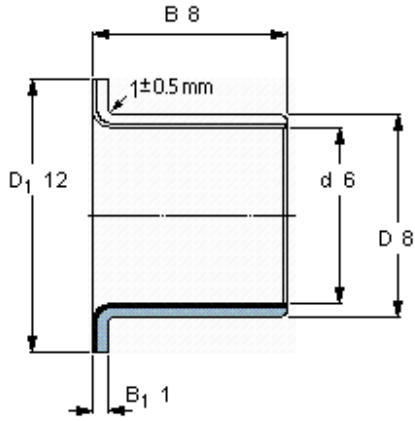

Specific load factor
Material constant

K 80
K_M 480