


Composite dry sliding bushings, metric dimensions

Principal dimensions			Basic load ratings		Mass	Designation
d	D	B	dynamic C	static C0	kg	-
mm			kN			
55	60	40	173	540	0,14	PCM 556040 E

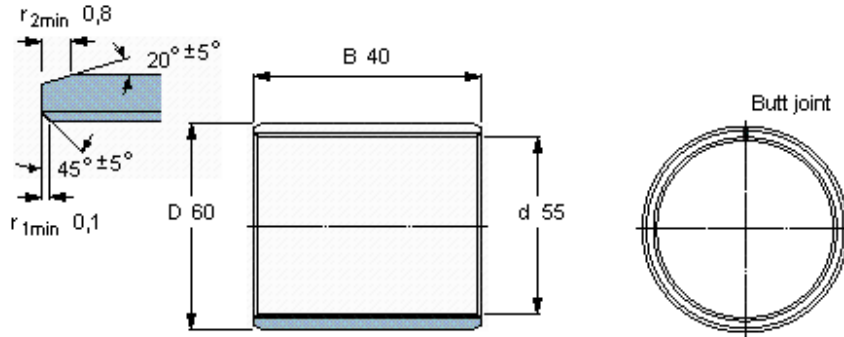

Specific load factor	K 80
Material constant	K_M 480