



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D <sub>1</sub>	B	B <sub>1</sub>	radial dynamic C	static C <sub>0</sub>	axial dynamic C <sub>a</sub>	static C <sub>0</sub>		
mm					kN				kg	-
8	10	15	5,5	1	2,24	6,95	5,1	16	0,0021	PCMF 081005.5 E

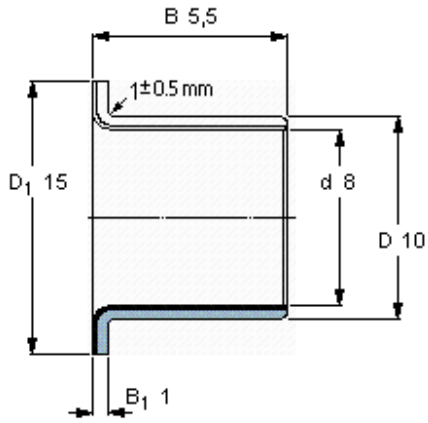

**Specific load factor**  
**Material constant**

K 80  
K<sub>M</sub> 480