



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D1	B	B1	radial dynamic C	static C0	axial dynamic Ca	static C0		
mm					kN				kg	-
12	14	20	9	1	6,7	20,8	9,15	28,5	0,0042	PCMF 121409 E

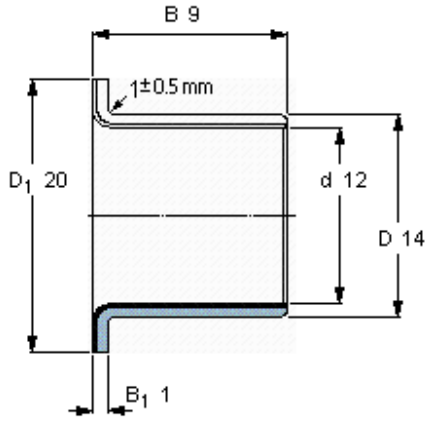

Specific load factor
Material constant

K 80
K_M 480