
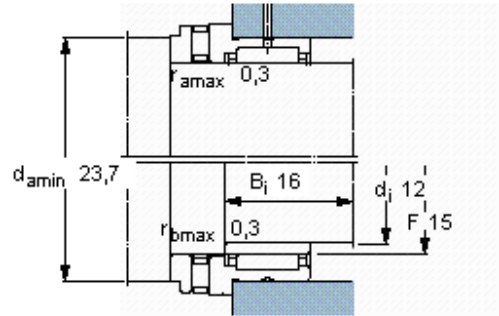


1\_18, needle roller/full complement thrust ball bearings

Principal dimensions			Basic load ratings				Speed ratings		Limiting speed	Designation
F <sub>w</sub>	D	C	radial dynamic C	static C0	axial dynamic C	static C0	Reference speed			
mm			kN				r/min		-	
<b>15</b>	24	23	11	14	11,2	27	4300	8500	<b>NKXR 15</b>	

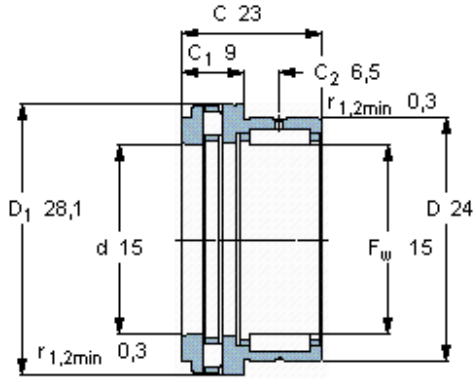

**Appropriate inner ring**

IR 12x15x16