



Composite dry sliding bushings, Composite dry sliding flanged bushings

Principal dimensions					Basic load ratings				Mass	Designation
d	D	D ₁	B	B ₁	radial dynamic C	static C ₀	axial dynamic Ca	static C ₀		
mm					kN				kg	-
14	16	22	17	1	16,6	52	10	31,5	0,0075	PCMF 141617 E

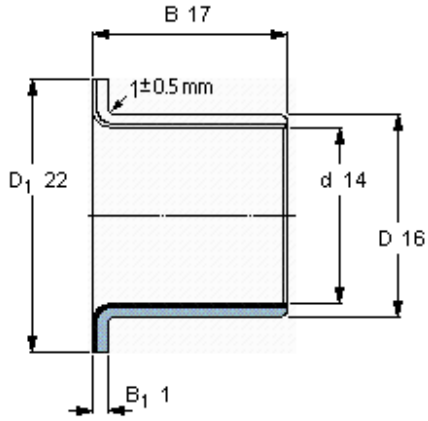

Specific load factor
Material constant

K 80
K_M 480