


Needle roller bearings, alignment, with an inner ring

Principal dimensions			Basic load ratings		Speed ratings		Designation
d	D	B	dynamic C	static C0	Reference speed	Limiting speed	
mm			kN		r/min		-
20	42	20	19	32,5	16000	18000	PNA 20/42

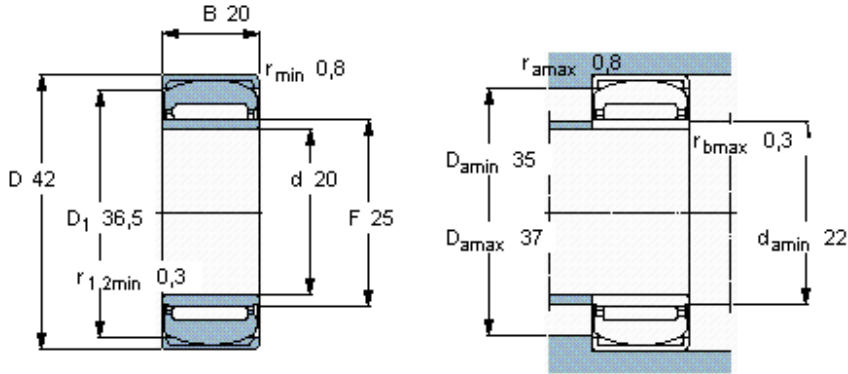

Permissible axial displacement from the normal position of one bearing ring relative to the other:
 $s \leq 0,5$